

PAS 5420:2023

Liquid fuels – Sustainable bioliquid
fuels for use in fixed combustion
applications for heating, hot water
and cooking – Specification



Publishing and copyright information

The BSI copyright notice displayed in this document indicates when the document was last issued.

© The British Standards Institution 2023.

Published by BSI Standards Limited 2023.

ISBN 978 0 539 20345 5

ICS 27.190; 13.020.20

No copying without BSI permission except as permitted by copyright law.

Publication history

First published April 2023

Contents

Foreword	ii
Section 1: General	iv
0 Introduction.....	iv
1 Scope	1
2 Normative references	2
3 Terms, definitions and abbreviated terms	3
Section 2: Distributors	4
4 Requirements	4
5 Auditing	5
6 Bioliquid fuel evaluation process	6
Section 3: Auditors	7
7 Audit reporting	7
Annexes	
Annex A (informative) Standard Assessment Procedure 10.2 Table 12 [1] ...	8
Annex B (informative) Product data sheet	9
Bibliography	11
List of figures	
Figure 1 – Fuel evaluation process flowchart	6
List of tables	
Table A.1 – Fuel prices, emission factors and primary energy factors.....	8
Table B.1 – Product data sheet	9

Foreword

This PAS was sponsored by OFTEC (Oil Firing Technical Association Ltd). Its development was facilitated by BSI Standards Limited and it was published under licence from The British Standards Institution. It came into effect on 30 April 2023.

Acknowledgement is given to Alan C Black, as the technical author, and the following organizations that were involved in the development of this PAS as members of the Steering Group:

- Argent Energy
- BRE Group
- Crown Oil
- Department for Energy Security and Net Zero (DESNZ)
- Environment Agency
- Neste Corporation
- OFTEC (Oil Firing Technical Association Ltd)
- Salford University
- UKIFDA (UK and Ireland Fuel Distributors Association)

Acknowledgement is also given to the members of a wider review panel who were consulted in the development of this PAS.

The British Standards Institution retains ownership and copyright of this PAS. BSI Standards Limited, as the publisher of the PAS, reserves the right to withdraw or amend this PAS on receipt of authoritative advice that it is appropriate to do so. This PAS will be reviewed at intervals not exceeding two years.

This PAS is not to be regarded as a British Standard. It will be withdrawn in the event it is superseded by a British Standard.

The PAS process enables a standard to be rapidly developed in order to fulfil an immediate stakeholder need. A PAS can be considered for further development as a British Standard, or constitute part of the UK input into the development of a European or international standard.

Information about this document

Copyright is claimed on Table A.1. Copyright holders are Department for Energy Security and Net Zero, 1 Victoria Street, London, SW1H 0ET.

Copyright is claimed on Table B.1. Copyright holders are Energy Security and Net Zero, 1 Victoria Street, London, SW1H 0ET.

This publication can be withdrawn, revised, partially superseded or superseded. Information regarding the status of this publication can be found in the Standards Catalogue on the BSI website at bsigroup.com/standards, or by contacting the Customer Services team.

Where websites and webpages have been cited, they are provided for ease of reference and are correct at the time of publication. The location of a webpage or website, or its contents, cannot be guaranteed.

Product certification

Users of this PAS are advised to consider the desirability of third-party certification/inspection/testing of product conformity to this PAS. Users seeking assistance in identifying appropriate conformity assessment bodies or schemes may ask BSI to forward their enquiries to the relevant association.

Presentational conventions

The provisions of this document are presented in roman (i.e. upright) type. Its requirements are expressed in sentences in which the principal auxiliary verb is “shall”.

Commentary, explanation and general informative material is presented in smaller italic type, and does not constitute a normative element.

Where words have alternative spellings, the preferred spelling of the *Shorter Oxford English Dictionary* is used (e.g. “organization” rather than “organisation”).

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by

BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

Compliance with a PAS cannot confer immunity from legal obligations.

Section 1: General

0 Introduction

PAS 5420 has been developed to provide the liquid fuel firing industry with an environmental sustainability standard. This PAS sets environmental thresholds and limits for bioliquid fuels for fixed combustion purposes to enable the decarbonization of existing off gas-grid liquid fuel heating and hot water provision in a controlled and sustainable manner.

PAS 5420 is designed to debar environmentally damaging bioliquid fuel feedstocks and processes from the heating and hot water supply chain. The implementation of PAS 5420 limits future fuel feedstocks to waste-derived sources, and creates and maintains a renewable and sustainable alternative to fossil fuels, drastically reducing carbon emissions from domestic heating to support the UK Government's target of achieving net zero carbon emissions target by 2050.

PAS 5420 defines the acceptable (waste source) feedstock greenhouse gas (GHG) emission parameters necessary to achieve and maintain bioliquid fuel carbon equivalent point of use emissions (CO_2e) which do not exceed those values published within Table 12 of SAP 10.2 [1] and Table 32 of SBEM 2022 [2].

1 Scope

This PAS specifies requirements for the provision of sustainable bioliquid fuels for use in district and individual heating, hot water and cooking applications.

PAS 5420 is intended to be applied primarily by the liquid fuel supply chain and their auditors. Accordingly, prior industry knowledge and understanding of this context are necessary for those intending to apply the requirements contained in this document

It applies to bioliquid fuels derived from renewable fuel sources produced from non-virgin (waste) feedstocks that result in carbon equivalent lifecycle emissions not exceeding 0.036 kg CO₂e per kWh when utilized for fixed combustion purposes.

This PAS covers:

- bioliquid fuel types derived from single or multiple waste sources;
- sustainability factors (e.g. fuel type, composition and provenance, and fuel lifecycle); and
- carbon emissions and primary energy usage from production through to point of use.

NOTE 1 The PAS aligns with the Renewable Energy Directive (RED II) [3], the Building Research Establishment (BRE) Standard Assessment Procedure (SAP), 10.2, Table 12 [1], and the Department for Levelling Up, Housing and Communities (DLUHC) National Calculation Methodology (NCM) Simplified Building Energy Model (SBEM) for non-domestic buildings 2022, Table 32 [2].

This PAS does not cover:

- liquid fossil fuels or blends containing liquid fossil fuels and bioliquid fuels;
- liquid fuels for transportation;
- technical requirements for the application, composition and specification of liquid fuels;
- fuel efficiency for fixed combustion; and
- fuels subjected to post-production/aftermarket combustion-enhancing fuel additives.

The PAS is for use by auditors and distributors of bioliquid fuels.

It might also be of interest to producers, importers and blenders of bioliquid fuels, liquid fuel equipment manufacturers, fuel and fuel equipment trade associations, certification/accreditation bodies and governing bodies.

NOTE 2 Examples of liquid fuels that might be covered by the PAS are paraffinic liquid fuels conforming to BS EN 15940, such as hydrotreated vegetable oils (HVOs), and fatty acid methyl esters (FAMES) conforming to BS EN 14214.

NOTE 3 The bioliquid fuels described within this standard are not suitable for use in appliances which incorporate vaporizing sleeve burners.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes provisions of this document.¹⁾ For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

Standards publications

BS EN 14214, *Liquid petroleum products – Fatty acid methyl esters (FAME) for use in diesel engines and heating applications – Requirements and test methods*

BS EN 15940, *Automotive fuels – Paraffinic diesel fuel from syntheses or hydrotreatment – Requirements and test method*

BS EN 16214-1, *Sustainability criteria for the production of biofuels and bioliquids for energy applications – Principles, criteria, indicators and verifiers – Part 1: Terminology*

Other publications

[N1] BUILDING RESEARCH ESTABLISHMENT LTD (BRE). *CO₂ and primary energy factors for SAP*, Standard Assessment Procedure 10 Technical Paper S10TP-15. London: BRE, November 2020.

¹⁾ Documents that are referred to solely in an informative manner are listed in the Bibliography.

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this PAS, the terms and definitions given in BS EN 16214-1 and the following apply.

3.1.1 auditor

auditable control process verifying organization, body or assurance scheme

3.1.2 bioliquid

liquid fuel produced from waste source material

NOTE 1 *An example of this is used cooking oil certified under RED II [3].*

NOTE 2 *This means waste material which, after process treatment, contains properties that enable combustion, and which satisfies the requirements of BS EN 15940 or BS EN 14214.*

3.1.3 carbon (dioxide) equivalent emissions (CO₂e)

amount of environmental impact total greenhouse gas emissions

3.1.4 common industry collation point

organization or body which collates and summarises audited data on an annual basis in support of inclusion of bioliquid fixed combustion fuel emission data in national carbon and greenhouse gas calculation methodologies

NOTE *Examples of the calculation methodologies include SBEM [2] and SAP [1].*

3.1.5 distributor

supplier of liquid fuels to end users

3.1.6 greenhouse gas

gases given off as a consequence of combustion which are identified as having a negative impact on the environment

3.1.7 liquid fuel

energy sources capable of being transported, stored and combusted while in their natural liquid state

3.1.8 sustainability statement

published statement declaring the greenhouse gas CO₂ emissions associated with the production of the fuel

NOTE 1 *Attention is drawn to the Renewable Energy Directive [3].*

NOTE 2 *This may also be referred to as a Renewable Fuel Declaration or as Proof of Sustainability.*

3.2 Abbreviated terms

For the purposes of this PAS, the following abbreviated terms apply.

BRE	Building Research Establishment
CO ₂ e	carbon dioxide equivalent
DLUHC	Department for Levelling Up, Housing and Communities
FAME	fatty acid methyl ester
FA/UCOME	fatty acid/used cooking oil methyl ester
GHG	greenhouse gas
HVO	hydrotreated vegetable oil
MJ	megajoule
NCM	National Calculation Methodology
OFTEC	Oil Firing Technical Association Ltd
PE	primary energy factor
POS	proof of sustainability
RED	Renewable Energy Directive
SAP	Standard Assessment Procedure
SBEM	Simplified Building Energy Model
UCOME	used cooking oil methyl ester

Section 2: Distributors

4 Requirements

4.1 Sustainability statement

Bioliqid fuels intended for use in fixed combustion applications shall have a total GHG value not exceeding 10 g/MJ CO₂e in terms of transport, processing and distribution combined.

***NOTE** Attention is drawn to RED II [3] in respect of the legal obligation to make a biofuels sustainability statement publicly available.*

4.2 SAP emissions – bioliqid fuels

Bioliqid fuels intended for fixed combustion applications shall be evaluated in accordance with BRE methodology S10TP-15 [N1].

When the bioliqid fuel has been evaluated:

- the CO₂e value shall not exceed 0.036 kg CO₂e per kWh; and
- the primary energy factor (PE) value shall not exceed 1.180 (kWh per kWh).

***NOTE 1** Refer to Annex A, Table A.1, which shows liquid fuel comparative PE and CO₂e values at the date and time of printing of this document.*

***NOTE 2** Liquid fuels which satisfy 4.2 need technical evaluation for suitability for fixed combustion applications following the OFTEC HVO Handbook [4].*

4.3 Fuel standards

The bioliqid fuel shall conform to BS EN 15940 (HVO) or BS EN 14214 (FA/UCOME).

***NOTE** The application of post-production/aftermarket fuel combustion-enhancing additives and/or fossil or non-waste derived fuels is prohibited.*

4.4 Quality assurance and control

The distributor shall operate a quality assurance and auditable control process which enables supply chain verification.

5 Auditing

5.1 General

Audits shall be conducted at least annually and shall consist of the steps outlined in 5.2 to 5.4.

5.2 Verification

Verification shall include:

- certification of HVO against BS EN 15940 (see Annex A) or certification of FA/UCOME against BS EN 14214; and
- biofuels sustainability statement (See 4.1).

NOTE Certification can be first, second or third party.

5.3 Distributor pre-purchase checks

Prior to the purchase of bioliquid fuels, the distributor shall obtain certifications as per 5.2 and proof of sustainability from their supplier or quality assurance scheme.

The distributor shall retain certifications and proof of sustainability as part of their auditable internal quality assurance process.

NOTE The OFTEC HVO Handbook [4] should be used as a technical reference regarding the process of evaluating the technical suitability of liquid fuels for use in fixed combustion applications.

5.4 Distributor fuel purchase records

All distributor purchases of bioliquids for use in fixed combustion heating, hot water and cooking applications shall be verified by audit.

Audit procedures shall capture and record:

- total volumes of named bioliquid purchased for resale per annum; and
- average total GHG CO₂e g/MJ per annum for each bioliquid fuel purchased (see Clause 4.1).


NOTE 1 New alternative bioliquid fuels not currently cited within this PAS which might become available in the future need to be verified against appropriate technical and sustainability standards.

NOTE 2 Audit data provided to OFTEC or other common industry collation point is for the purposes of annual submission to BRE for future BRE review and revisions of Annex A, Table A.1, carbon equivalent emission (CO₂e) and primary energy factors (kW/kW) as contained in SAP [1].

6 Bioliquid fuel evaluation process

Figure 1 sets out the process that shall be followed in specific order for the evaluation of liquid fuels to determine their suitability for industry use in accordance with the scope of this PAS.

Figure 1 – Fuel evaluation process flowchart

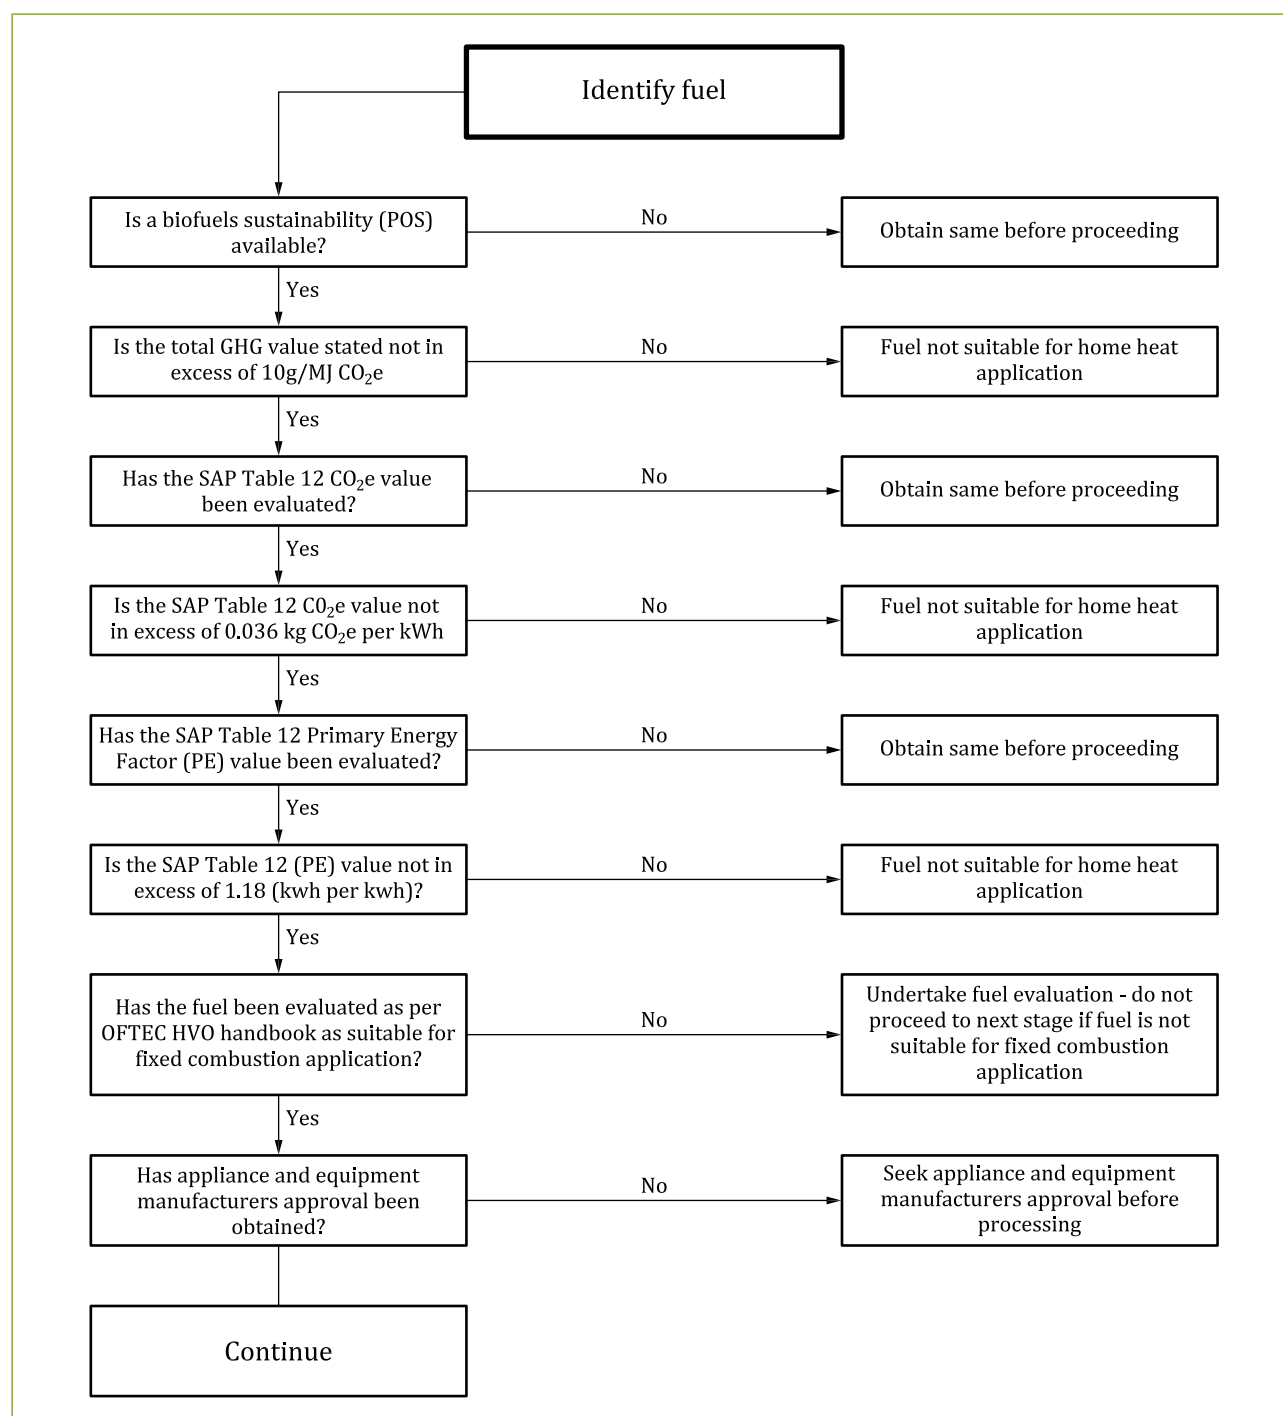

Section 3: Auditors

7 Audit reporting

The auditors shall collate and summate all audited data collected in accordance with 5.4 from distributors purchase records and shall provide the same to OFTEC on an annual basis.

Annex A (informative)

Standard Assessment Procedure 10.2 Table 12 [1]

Extract of Table 12 from SAP 10.2 [1] demonstrating comparative CO₂e emissions and PE for liquid fuels which have been evaluated in accordance with SAP 10 Technical Paper S10TP-15 [N1] (modified).

Table A.1 – Fuel prices, emission factors and primary energy factors

Fuel	Standing charge	Unit price pence/kWh	Emissions kg CO ₂ e per kWh	Primary energy factor	Fuel code
Liquid fuels:					
• heating oil (kerosene)	–	4.94	0.298	1.180	4
• bioliquid HVO from cooking oil ^{A)}	–	6.79	0.036	1.180	71
• bioliquid FAME from animal/vegetable oil ^{B)}	–	6.79	0.018	1.180	73
• B30K ^{C)}	–	5.49	0.214	1.136	75
<p>^{A)} For appliances that specifically use bioliquid HVO to BS EN 15940, certified as wholly derived from waste/used cooking oil.</p> <p>^{B)} For appliances that specifically use bioliquid FAME to BS EN 14214, certified as wholly derived from waste animal fats/used cooking oil.</p> <p>^{C)} For appliances that specifically use a blend of 30% bio-liquid FAME^{B)} and 70% kerosene (B30K).</p> <p>NOTE Copyright is claimed in this table. Reproduction of this table and making products from it might infringe that copyright. Details of the copyright owner can be found in the Foreword.</p>					

Annex B (informative)

Product data sheet

Table B.1 is an example of a typical UK HVO producer's product data sheet.

NOTE Copyright is claimed in this table. Reproduction of this table and making products from it might infringe that copyright. Details of the copyright owner can be found in the Foreword. Units are as per original CEN and BSI publications referenced in this document.

Table B.1 – Product data sheet

Parameter	Test method	Units	Specification	Typical value
Appearance	ASTM D4176-2	–	Clear and bright	Clear and bright
Density	EN ISO 12185	kg/m ³	0.770–0.790	0.780
Viscosity	EN ISO 3104	mm ² /s	2.0–4.0	2.8
Sulfur content	EN ISO 20884	mg/kg	5 max.	<5
Flashpoint	EN ISO 2719	°C	61 min.	>70
Cloud point Summer Winter	EN 23015	°C	– –15 max. –34 max.	– <–15 <–34
Summer Winter	–	–	–15 max. –34 max.	<–15 <–34
Water content	EN ISO 12937	mg/kg	200 max.	40
Ash content	EN ISO 6245	% m/m	0.001 max.	<0.001
Initial boiling point	EN ISO 3405	°C	180 min.	>180
Recovered at 250°C	EN ISO 3405	% v/v	<65	<20
Recovered at 350°C	EN ISO 3405	% v/v	85 min.	>98
95% recovered at	EN ISO 3405	°C	360 max.	>95
Cetane number	EN 15195	–	70 min.	80
Cetane index	EN ISO 4264	–	70 min.	80
CFPP	EN 116	°C	–15....	–34
Carbon residue (on 10% distillation residue)	EN ISO 10370	% m/m	0.1 max.	<0.01
Oxidation stability	EN ISO 12205	g/m ³	25 max.	<5
Copper strip corrosion 3h/50°C	EN ISO 2160	–	1 max.	1a
Net heat of combustion	ASTM D4809	MJ/kg	42 min.	44

Table B.1 – Product data sheet (*continued*)

Parameter	Test method	Units	Specification	Typical value
Particulate matter	EN 12662	mg/kg	10 max.	<1
Lubricity/HFRR	EN ISO 12156-1	mm	400 max.	350
Renewable diesel	–	% v/v	100	100
Fatty acid methyl ester	–	% v/v	0	0
Total aromatics	EN 12916	% wt	1.1 max.	<1
Polycyclic aromatics (PAH)	SS 155116	% v/v	0.02 max.	<0.02

Bibliography

Standards publications

For dated references, only the edition cited applies.
For undated references, the latest edition of the referenced document (including any amendments) applies.

Standards publications

ASTM D4809, *Standard Test Method for Heat of Combustion of Liquid Hydrocarbon Fuels by Bomb Calorimeter (Precision Method)*

ASTM D4176-2, *Standard Test Method for Free Water and Particulate Contamination in Distillate Fuels (Visual Inspection Procedures)*

EN 116, *Diesel and domestic heating fuels – Determination of cold filter plugging point – Stepwise cooling bath method*

EN 12662, *Liquid petroleum products – Determination of total contamination in middle distillates, diesel fuels and fatty acid methyl esters*

EN 12916, *Petroleum products – Determination of aromatic hydrocarbon types in middle distillates – High performance liquid chromatography method with refractive index detection*

EN 15195, *Liquid petroleum products – Determination of ignition delay and derived cetane number (DCN) of middle distillate fuels by combustion in a constant volume chamber*

EN 23015, *Petroleum products – Determination of cloud point*

EN ISO 2160, *Petroleum products – Corrosiveness to copper – Copper strip test*

EN ISO 2719, *Determination of flash point – Pensky-Martens closed cup method*

EN ISO 3104, *Petroleum products – Transparent and opaque liquids – Determination of kinematic viscosity and calculation of dynamic viscosity*

EN ISO 3405, *Petroleum and related products from natural or synthetic sources – Determination of distillation characteristics at atmospheric pressure*

EN ISO 4264, *Petroleum products – Calculation of cetane index of middle-distillate fuels by the four variable equation*

EN ISO 6245, *Petroleum products – Determination of ash*

EN ISO 10370, *Petroleum products – Determination of carbon residue – Micro method*

EN ISO 12156-1, *Diesel fuel – Assessment of lubricity using the high-frequency reciprocating rig (HFRR) – Part 1: Test method*

EN ISO 12185, *Crude petroleum and petroleum products – Determination of density – Oscillating U-tube method*

EN ISO 12205, *Petroleum products – Determination of the oxidation stability of middle-distillate fuels*

EN ISO 12937, *Petroleum products – Determination of water – Coulometric Karl Fischer titration method*

EN ISO 20884, *Petroleum products – Determination of sulfur content of automotive fuels – Wavelength-dispersive X-ray fluorescence spectrometry*

SS 155116, *Petroleum products – Determination of aromatics in diesel fuel – Mono- and dicyclic aromatic compounds and PAH*

Other publications

- [1] BUILDING RESEARCH ESTABLISHMENT (BRE). *Standard Assessment Procedure (SAP), 10.2*. London: BRE, 2021²⁾.
- [2] DEPARTMENT FOR LEVELLING UP, HOUSING, AND COMMUNITIES (DLUHC). National Calculation Methodology (NCM) Simplified Building Energy Model (SBEM) for non-domestic buildings. April 2022³⁾.
- [3] EUROPEAN UNION. Directive (EU) 2018/2001 of the European Parliament and of the Council of 11 December 2018 on the promotion of the use of energy from renewable sources (recast) (Text with EEA relevance). Official Journal of the European Union, 2018⁴⁾.
- [4] OIL FIRING TECHNICAL ASSOCIATION (OFTEC). *Hydrotreated vegetable oil (HVO) handbook, Issue 1.3*. OFTEC, December 2021⁵⁾.

Further reading

DEPARTMENT FOR TRANSPORT (DfT), *Renewable Transport Fuel Obligation (RTFO)*. London: DfT, 2021⁶⁾.

EUROPEAN COMMITTEE FOR STANDARDIZATION (CEN). PD CEN/TR 16389:2017, *Automotive fuels – Paraffinic diesel fuel and blends with FAME – Background to the parameters required and their respective limits and determination*.

Useful websites

The UKIFDA Customer Charter is available at www.ukifda.org/code-of-practice-and-customer-charter/

²⁾ Available at www.bregroup.com/sap/sap10/

³⁾ Available at www.uk-ncm.org.uk/

⁴⁾ Available at www.gov.uk/eu-withdrawal-act-2018-statutory-instruments/the-renewable-energy-energy-efficiency-and-motor-fuel-emissions-miscellaneous-amendments-eu-exit-regulations-2021

⁵⁾ Available at www.oftec.org/media/p2gdjxyo/oftec_hvo_handbook_issue1-3_dec2021.pdf

⁶⁾ Available at www.legislation.gov.uk/ukdsi/2020/9780348213324

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email cservices@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Relations

Tel: +44 345 086 9001

Email: cservices@bsigroup.com

Subscription Support

Tel: +44 345 086 9001

Email: subscription.support@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



BSI, 389 Chiswick High Road
London W4 4AL
United Kingdom
www.bsigroup.com

